

# Professional cleaning made simple

### Nanjing TVX Cleaning Equipment Co., Ltd.

- Building 8, Phase 2, Zifeng R&D Center, NO. 121 Baihe Road, Pukou District, Nanjing City, Jiangsu Province, China
- in Nanjing TVX Cleaning Equipment Co., Ltd.
- sales@tvxclean.com
- +86 18061203729





Website

WeChat

## Walk-behind Scrubber Dryer



# **T15** Series



### Product Features / Efficient


> With the cleaning width of 350mm, it is compact and flexible and suitable for cleaning the narrow areas, including the dead corners  $> 1 \times 24V/28Ah$  lithium battery provides the endurance of up to 90 minutes (T15BT) Electronically controlled water regulation, the water output can meet the operation time of 40 to 124 minutes, thus achi accurate control, effective water saving and efficient water use Multi-angle cleaning during forward and backward directions, ▶ Water output from the center of the motor is better for the mixing of solution and detergent, and the further even distribution on the brush ▶ The anti-overflow design at waste vacuum head prevents wastewater from entering the vacuu ▶ The telescopic vacuum hose can be shortened as much as possible while ensuring the horiz ▶ Soft start of brush motor can reduce the burden of motor and battery Built-in charger design avoids stains, water residues and potential safety hazards Built with self-driving motor, When the head is lifted, the it can move forward without squeegee automatically

Product Features / User-friendly

pushing (T15BT)

rotates 180°, which is suitable

for cleaning various corners

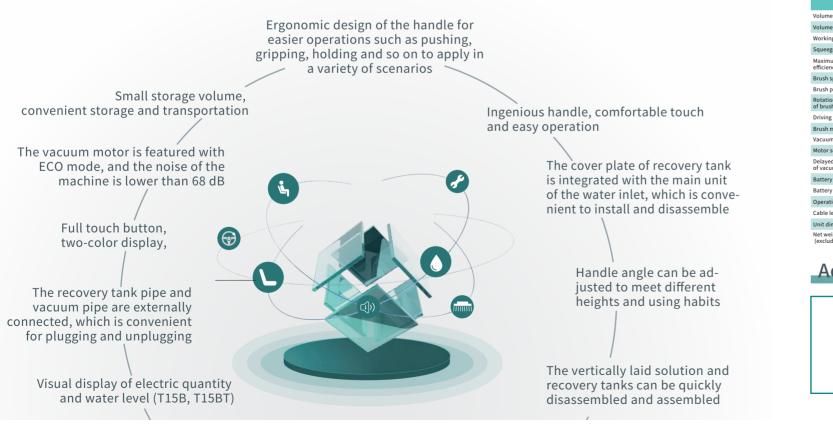

### Parameters

	T15E	T15B	T15BT
Volume of solution tank		10L	
Volume of recovery tank		15L	
Working width		350mm	
Squeegee width		450mm	
Maximum working efficiency	1597 n²/h	1597 m²/h	1800m²/h
Brush specification		13 Inches	
Brush pressure		30Kg	
Rotation speed of brush disc	130rpm	120rpm	120rpm
Driving motor power	1	/	24V/180W×2
Brush motor power	AC110V/120W or AC220V/120W	DC24V/250W	DC24V/250W
Vacuum motor power	AC110V/400W or AC220V/400W	DC24V/250W	DC24V/250W
Motor soft starter		Standard	
Delayed shutdown of vacuum motor		Standard	
Battery specification	1	12V/36Ah×2	24V/28Ah
Battery type		Lead acid battery	Lithium battery
Operation duration	1	130Min	90Min
Cable length	15m	1	1
Unit dimension		640×460×1100mm	
Net weight (excluding batteries)		40Kg	

### Accessories





13" Water lock brush

Rubber strip



### **Application scenarios**





Campus



Plant Workshop



Supermarket

Hospital

CE



Traffic Hub



13" Pad holder (optional)