

# Professional cleaning made simple

# Nanjing TVX Cleaning Equipment Co., Ltd.

- Building 8, Phase 2, Zifeng R&D Center, NO. 121 Baihe Road, Pukou District, Nanjing City, Jiangsu Province, China
- in Nanjing TVX Cleaning Equipment Co., Ltd.
- sales@tvxclean.com
- **a** +86 18061203729











#### 

#### Product Features / Efficient







55L large-capacity solution tank offers a cleaning width of 510mm

Foot pedal controls the height of brush, which is with icon as identification efficient and convenient is intuitive and easy to use

(T55 BT)







Stainless steel filter screen blocks impurities in water and prevents waterway blockage. It endurance of up to 3.5 can be used repeatedly after cleaning




- Self-driving system enables easy forward moving and efficient cleaning (T55 BT)
- Water output from the center of the motor is better for the mixing of solution and detergent, and the further even distribution on the brush
- Delayed off function of suction motor, zero residual wastewater in the tank
- Adjustable ground pressure of the squeegee can be adjusted to ensure the effect of water absorption
- The anti-overflow design at waste vacuum head prevents wastewater from entering the vacuum motor
- The inner wall of the water tank is flat and smooth, which can reduce bacterial and stain residue

# Product Features / User-friendly



- Equipped with vacuum motor mute system, making the noise of machine even lower
- Quick-mounting design of squeegee and rubber strips usable on four sides, installation and disassembly can be completed instantly without tools
- The splash proof rubber of the brush is designed with elastic tension spring, which saves tools for assembly and disassembly
- Flat bottom of the recovery tank is easy to clean and maintain
- A buckle groove is reserved at the top of the recovery tank for easier maintenance
- The flip water tank is effectively locked with buckles on both sides, making maintenance easier

### Product Features /Safe

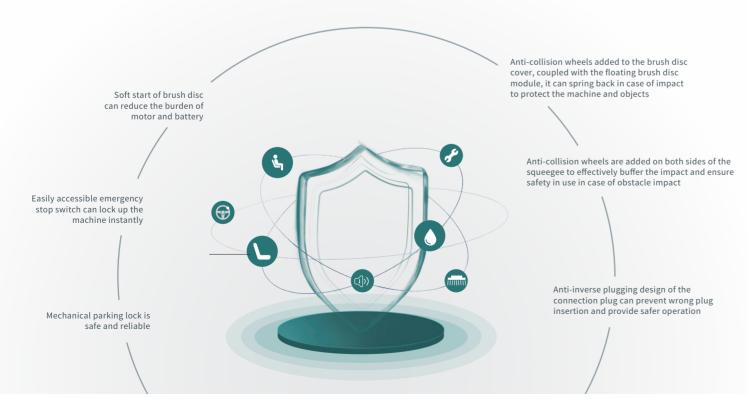

### **Parameters**

	T55B	T55BT
Volume of solution tank	55L	
Volume of recovery tank	65L	
Working width	510mm	
Squeegee width	780mm	
Maximum forward speed	1	4.5Km/h
Maximum working efficiency	2050㎡/h	2250 m²/h
Brush specification	19 Inches	
Brush pressure	35Kg	
Rotation speed of brush	180rpm	
Driving motor power	1	24V/120W
Brush motor power	24V/500W	
Vacuum motor power	24V/390W	
Delayed shutdown of vacuum motor	Standard	
Battery specification	12V/100Ah×2	
Battery duration	3.5h	
Battery type	Lead acid (upgradeable to lithium battery)	
Battery weight	33Kg×2	
Dimension	1300×550×1030mm	
Net weight(excluding batteries)	85Kg 92Kg	

## Application scenarios



Supermarket Hospital

Traffic hub

### Accessories



19" Brush Rubber strip PP0.6



19" Pad holder (optional)



19" Brush (optional) PP 0.28