

Professional cleaning made simple

Nanjing TVX Cleaning Equipment Co., Ltd.

- Building 8, Phase 2, Zifeng R&D Center, NO. 121 Baihe Road, Pukou District, Nanjing City, Jiangsu Province, China
- in Nanjing TVX Cleaning Equipment Co., Ltd.
- sales@tvxclean.com
- **+86** 18061203729











Product Features / Efficient



- Automatic assembly and disassembly of brush disc, making operation ever simpler
- The inner wall of the water tank is flat and smooth, which can reduce bacterial and stain residue

90L high-capacity solution tank, ride-on operation for easy cleaning of large space prevents wastewater from



Ground pressure of the squeegee can be adjusted to ensure the effect of water absorption



High-quality elastic sealing Stainless steel filter screen strip is installed at the edge of the top cover of the and prevents waterway recovery tank to improve the tightness and water absorption effect



at waste vacuum head


blocks impurities in water blockage. It can be used repeatedly after cleaning



2×12V/120Ah large capacity maintenance free batteries provide the endurance of up to 4.5

- Cleaning width is available at 560mm and 700mm, offering higher cleaning efficiency
- Electronically controlled water regulation, accurate control of water output, effective water saving and efficient water use
- Water output from the center of the motor is better for the mixing of solution and detergent, and the further even distribution on the brush disc
- Delayed off function of suction motor, zero residual wastewater in the tank

Product Features / Safe

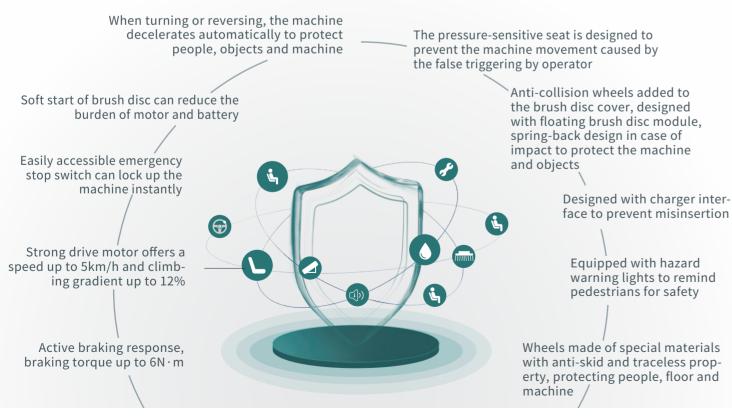

Product Features / User-friendly



Parameters

	T90 55R	T90 70R
Volume of solution tank	90L	
Volume of recovery tank	100L	
Cleaning width	560mm	700mm
Squeegee Width	780mm	860mm
Maximum running speed	5Km/h	
Maximum efficiency	2800㎡/h	3500㎡/h
Brush disc specification	21 inches	13 Inches×2
Brush disc pressure	38Kg	40Kg
Rotation speed of brush disc	180rpm	
Driving motor power	24V/300W	
Brush disc motor power	24V/500W	24V/400W×2
Vacuum motor power	24V/390W	
Delayed shutdown of vacuum motor	Standard	
Maximum climbing gradient	12%	
Turning deceleration	Standard	
Battery specification	12V/120Ah×2	
Endurance time	3.3h	4.5h
Battery type	Lead acid (upgradeable to lithium battery)	
Battery weight	33Kg×2	41Kg×2
Unit dimension	1365×665×1040mm	1365×750×1190mm
Net weight machine (excluding batteries)	113Kg	137Kg

Equipped with vacuum motor mute system, making the noise of machine even lower

Application scenario

• Flat bottom of the recovery tank is easy to clean and maintain



Community

Campus

Factory



Shopping mall



Hospital



Railway station

Accessories



21" brush disc \times 1 (T90 55R) 13" brush disc \times 2 (T90 70R) PP0.6



Rubber strip



Pad holder (optional)



13"/21" brush disc (optional) PP 0.28